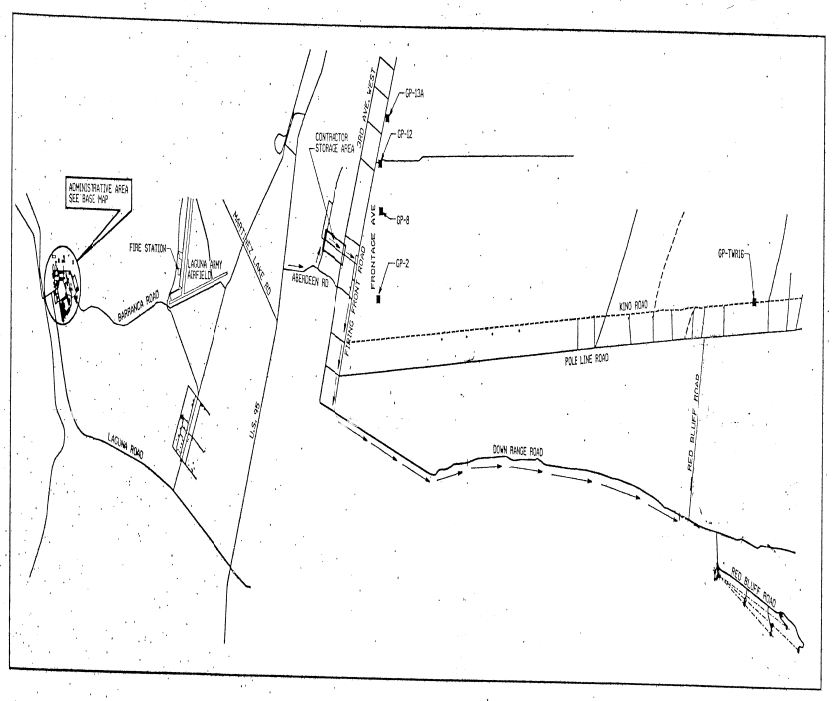

LOCATION MAP

SCALE: 1"=3000'

CONSTRUCTION PROCEDURE ON KOFA FIRING RANGE (KFR):

KOFA FIRING RANGE IS A RESTRICTED AREA. THE CONTRACTOR AND HIS PERSONNEL MUST BE BRIEFED BY YUMA PROVING GROUND (YPG) RANGE SAFETY PERSONNEL PRIOR TO COMMENCING ANY ACTIVITY AT KOFA FIRING RANGE.

THE CONTRACTOR SHALL COORDINATE ALL HIS CONSTRUCTION ACTIVITIES AT LEAST THREE WEEKS IN ADVANCE WITH KOFA TEST RANGE CONTROL, LOCATED ON SECOND FLOOR OF BUILDING 2100 AT MOBILITY TEST AREA (MTA).

THE CONTRACTOR AND HIS PERSONNEL SHALL OBTAIN CLEARANCE S) FROM RANGE CONTROL ON A DAILY BASIS BEFORE ENTERING THE KOFA RANGE AND #WEN LEAVING THE RANGE THE CLEARANCE (S) MUST BE CANCELLED. CLEARANCE (S) CAN BE OBTAINED BY RADIO OR PHONE (928-2510).

THE CONTRACTOR IS CAUTIONED THAT YPG TEST MISSIONS ALWAYS TAKES PRECEDENCE OVER CONSTRUCTION ACTIVITIES.

THE CONTRACTOR SHALL ENSURE THAT ALL OF HIS PERSONNEL THAT REQUIRED TO ENTER THE RANGE ARE FAMILIAR WITH THE APPLICABLE SECTIONS OF THE

"STANDING OPERATING PROCEDURE
YP-NTRO-P-100
RANGE OPERATIONS".

CONSTRUCTION OF STEEL BIN-WALLS REQUIRES PHASING.

PHASING:

CONSTRUCTION OF STEEL BIN-WALLS SHALL BE ACCOMPLISHED IN PHASES AS FOLLOWS:

THE CONTRACTOR IS ALLOWED TO CONSTRUCT ONLY "WO (2) BIN-WALLS SIMULTANEOUSLY AT EACH PHASE (ONE BIN-WALL AT EACH GUN POSITION). EACH PHASE CONSISTS OF CONSTRUCTION OF 2 BIN-WALLS AND ACCEPTANCE BY THE GOVERNMENT. THE FIRST PHASE MUST BE COMPLETED BEFORE INITIATION OF THE SECOND PHASE AND SO ON.

SYMBOL	DESCRIPTION	DATE	CHKD

U.S. ARMY YUMA PROVING GROUND
DIRECTORATE OF PUBLIC WORKS

CONSTRUCT BIN-WALLS AT GUN POSITIONS ON KFR

LOCATION MAP & NOTES

PROJECT NUMBER: 98-FIRE-01
DESIGNED BY: N.A.
DRAWN BY: N.A.
CHECKED BY: N.A.
APPROVED BY: N.A.

PM-H			TIDER
PM-F	ES		RK
PM-E-GT	EC		BR
		DATE:	MAY 97

SHEET REFERENCE NUMBER: C-2

SHEET 2 OF 6